



## 0-422-21 - LED CREE Headlamp with DI & DRL. Left Side RHD LHT

Durite CREE LED Headlamp 9-32V, High Beam (2\*30W), Low Beam (1\*30W), DI (12\*1W), DRL (2\*5W). IP68, Aluminium housing with 6 PIN DT Connector, PC Lens. 6000k. E Marked R10 R112 R6 R87. Approved for RHD LHT. Left Side Unit.

### Fly Leads:


Brown = Low Beam

Red = High Beam

Blue = DI

White = DRL

Black = Negative -VE

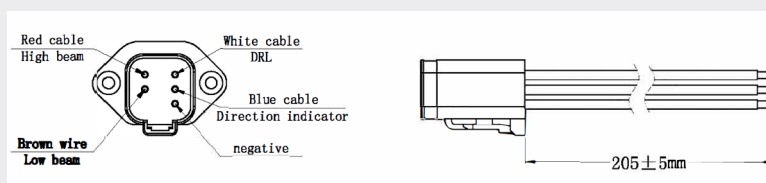

Note: For 6PIN Female DT connector see Durite 0-011-46

**THE TRUSTED QUALITY BRAND FOR PROFESSIONALS**



## TECHNICAL SPECIFICATIONS

Type	CREE LED Headlamp with DI/DRL. Left side RHD LHT.
Voltage	9-32VDC
LED's	High Beam 2*30W, Low Beam 1*30W, DI 12*1W, DRL 2*5W
Power	High Beam 60W, Low Beam 30W, DI 12W, DRL 10W
Current Draw	High Beam 3.64/1.82A, Low Beam 1.78/0.9A, DI 2.6/1.5A, DRL 0.46/0.23A at 12/24VDC
Lumens	High Beam 3500Lm, Low Beam 2500Lm.
IP Rating	IP68
Material Construction	Aluminium with PC Lens. Bracket SS304
Weight	2.500Kg
Dimensions	Please see below
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Certificate	CE, E Mark R10, R112, R87, R6

## TECHNICAL DRAWING

